CRYSTAL MOUNTAIN PRODUCT BROCHURE





EVERESTWater Cooler

EVERESTWater Cooler

Crystal Mountain is taking cooling the waters of the world to new heights with the introduction of the Everest. Its sleek two toned aesthetic will enhance any space. The sturdy and ergonomic faucet handles are 177.8mm (7 inches) higher than traditional units, which enable effortless dispensing. The quickly removable side panels facilitate access to all electrical components for easy maintenance and servicing. The innovative removable reservoir and faucet assembly make the cleaning and sanitizing process fast and simple. Crystal Mountain proves that anything is possible when there is a drive to overcome all obstacles.





Sturdy Metal Faucet Handles



Removable Reservoir/Faucet Assembly (patent pending)



Replaceable Lower Front Panel with Optional Integrated Cup Dispenser



Retrofitted to Become a Point of Use Dispenser

Features

- Modern, sleek and stylish design
- Innovative removable reservoir/faucet assembly
- Ergonomic faucet height
- High gloss finish
- DryGuard™ Patented no spill system
- Sturdy faucet handles
- Easily removed ABS side panels
- Maintenance friendly
- Replaceable lower front panel with integrated cup dispenser (optional)



Point of Use Kit

DryGuard™

Crystal Mountain's patented no spill system, the DryGuard™ protects floors against leaks caused by cracked or faulty bottles.





Performance and Specifications

General

An air-cooled water dispenser with a compressor-driven refrigeration system and a removable reservoir for sanitizing. Available in hot and cold, and cold and ambient

Cooler Cabinet

Standard colour in black and grey. Other colours available for high volume orders

Faucet Type

Covered one-piece mechanical faucets protect the faucet spout from contamination, are extra durable and add to the stylish presentation

Cold Water Tank Specifications

HDPE casing with 2.4L (0.6 gal) volume Cold water cooling capacity of 1L/hr (0.3 gal/hr) based on 21°C (69.8°F) room temperature

Cold Water Thermostat

Preset at factory to dispense water at temperatures from $4-10^{\circ}$ C(39.2-50°F) Adjustable cold control located at back of cabinet

Hot Water Tank

Stainless steel #304 casing with 1.1L (0.3 gal) volume Hot water capacity of 4.0L/hr (1.2 gal/hr) based on 21°C (69.8°F) room temperature

Hot Water Thermostat and Heaters

Automatic thermostat set at temperature range of 74-92°C (165.2-197.6°F) Manual thermostat reset in case of automatic thermostat failure ON/OFF switch is located at back of cabinet


Compressor

Hermetically sealed reciprocating compressor (220-240VAC 50Hz)

Refrigerant Type: R134a

Refrigerant Charge: 30g (1.1oz)

Dimensions and Freight Data

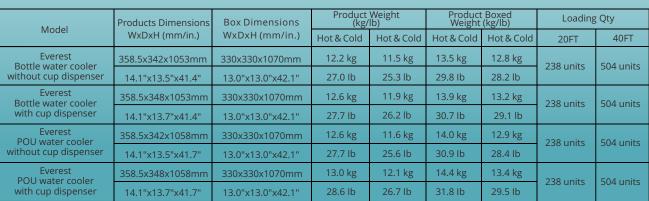





Crystal Mountain Products Limited European Sales Office

Fence House, Fence Avenue
Macclesfield, Cheshire
United Kingdom SK10 1LT
Tel: +44(0) 1625 439 111
Fax: +44 (0) 1625 502 527
E-mail: cmeurope@crystalcoolers.com

North American Sales Office

200 Carnegie Drive, Suite 234
St. Albert, AB, T8N 5A7 Canada
Toll Free: 800 878 6422
Tel: 1 780 454 4545
E-mail: sales@crystalcoolers.com

Crystal Mountain Products Inc. US Office / Warehouse

1000 H Taylor Station Rd Gahanna OH 43230 Tel: (614) 454 1618 Fax:(614) 409 9782 E-mail: sales@crystalcoolers.com

Crystal Mountain International Limited

Hong Kong Sales Office

Room 610, Winfield Commercial Building 6-8a Prat Avenue, Tsimshatsui Kowloon, Hong Kong Tel: (852) 2368 1989 Fax: (852) 3017 6727 E-mail: cmasia@crystalcoolers.com











Website: www.crystalcoolers.com

Crystal Mountain has a policy of continuous development and reserves the right to change specifications without notification.

